

SOCCER FIELD


*MEASUREMENTS are taken from outside to outside of the line.

If used on a football field, portable goals should be anchored at least 2 yards in front of the base of the existing football goalposts.

HASH MARK (optional)
(1 yd. in length beyond goal line;
11 yds. from touch line;
located at each corner of field)

For information on recommended specifications for lighting, you may contact:
Illuminating Engineering Society of North America
345 East 47th Street
New York, NY 10017
212-248-5000

Dotted line is minimum boundary for spectators, fencing or any objects.

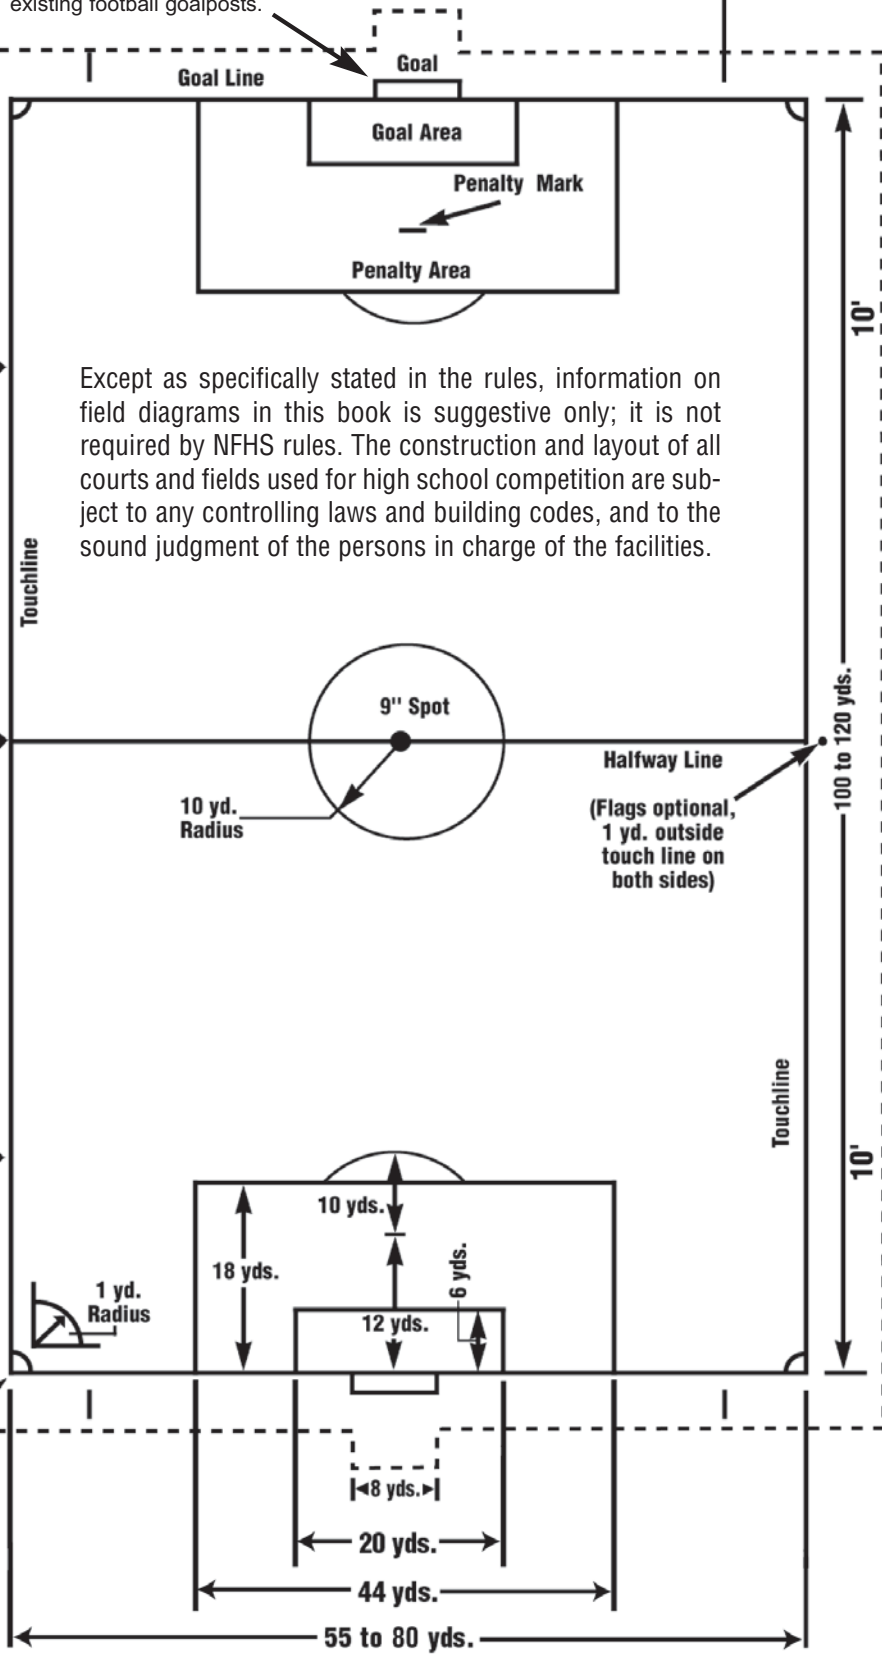

Except as specifically stated in the rules, information on field diagrams in this book is suggestive only; it is not required by NFHS rules. The construction and layout of all courts and fields used for high school competition are subject to any controlling laws and building codes, and to the sound judgment of the persons in charge of the facilities.

Pole: Minimum 1" diameter.
Flag: Minimum 5' high.
Install touching the outer edge of the lines at the corner.

An engineered natural turf soccer field should have a minimum of one-and-one-half percent (1.5%) slope for fields which are surface drained. For natural turf fields with a sub-surface drain system the slope should be no less than one (1.0%) percent. For synthetic turf fields with a sub-surface drain system the slope should be no less than one half of one (0.5%) percent. Slope is measured from center to side. For consulting services, contact SportsPLAN Studio, 816-842-5200.